


**Dimensions:**

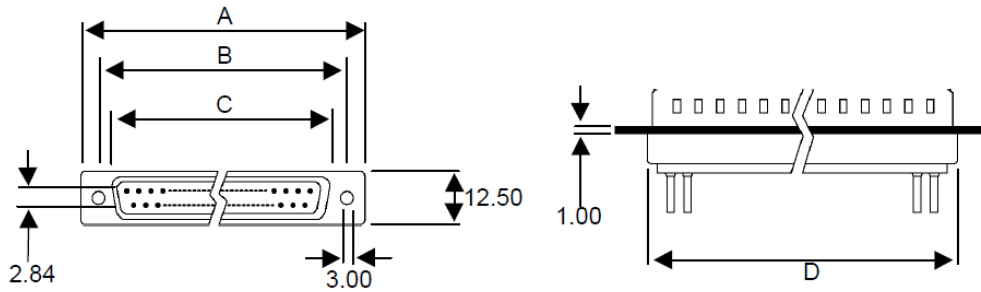

No. of Ways/Gender		Dimension			
		A	B	C	D
9	Male	30.81	24.88	16.92	19.28
	Female	30.81	24.88	16.33	19.28
15	Male	39.14	33.32	25.25	27.51
	Female	39.14	33.32	24.66	27.51
25	Male	53.04	47.04	38.96	41.30
	Female	53.04	47.04	38.38	41.30

**Materials and Finish:**

<b>Shell:</b>	Nickel plated steel
<b>Socket contact:</b>	Gold plated over nickel
<b>Insulator:</b>	PBT and glass fibre reinforced UL-94-VO
<b>Current rating:</b>	5 Amp
<b>Dielectric strength:</b>	1000V for one minute
<b>Insulator resistance:</b>	1000M $\Omega$ min. at 500VDC
<b>Temperature:</b>	-55°C to +105°C